

accelera


SPEED 'N STYLE TYRES



accelera

SPEED 'N STYLE TYRES

Accelera, the ultra-high performance tires are designed to be the most elegant and the safest tires ever. Thanks to DeltaMax technology that has enabled them to achieve maximum Grip, Comfort, Protection and Style. It ensures high precision of the tire where all aspects of the production process including product design are totally controlled by an automated system. Developed for drivers who care about how tire technology enhances their vehicle's performance and safety, tires provide immense durability, handling and traction while increasing tread life.

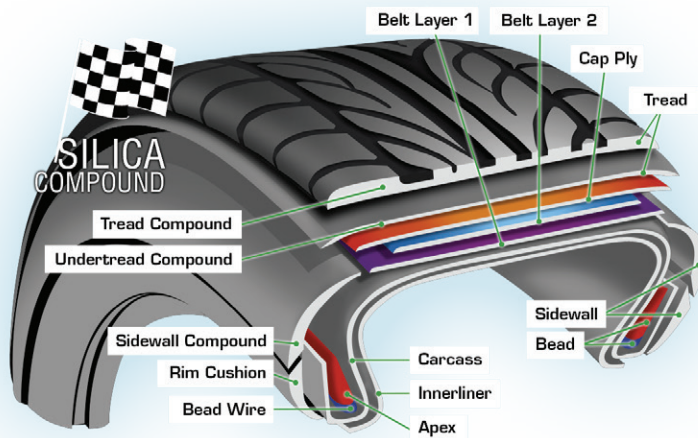


Accelera uses silica compound to get excellent grips and to overcome the aquaplaning forces on wet roads. It is designed for reduced noise level and carbondioxide emissions which also remarkably minimizes rolling resistance to save energy. The double, strong steel belt tied by cap layer makes the tire grip evenly on road surface, stays stable and durable on high speed. The sidewall is strong and flexible; hence it absorbs shocks, especially on rough surface. The comprehensive technology is intended to adopt not only the current trend of car development but also the future advancements.

ECO PLUSH

All Season Tires



Three main ribs with multi sipes
Provide excellent grip and low noise



Main groove and mini diagonal grooves
clear water rapidly to prevent aquaplaning



Center rib with adaptive sipes
help improve rolling & braking

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
80 Series	165/80 R13	83T	1074	44	4.5	6.5	23.4	8.9
70 Series	175/70 R13	82H	1047	44	5.0	7.0	22.7	9.3
	185/70 R14	88H	1235	44	5.5	7.4	24.3	9.1
65 Series	155/65 R14	75H	853	44	4.5	6.2	22.0	9.2
	185/65 R14	86H	1168	44	5.5	7.4	23.5	9.7
	185/65 R15	88H	1235	44	5.5	7.4	29.6	9.7
	195/65 R15	91H	1356	44	6.0	7.9	25.0	9.4
	205/65 R15	94V	1477	44	6.0	8.2	25.5	8.9
	215/65 R15	96H	1565	44	6.5	8.7	26.0	10.0
	215/65 R16	102V XL	1874	44	6.5	8.7	27.0	9.6
60 Series	185/60 R15	84H	1102	44	5.5	7.4	23.7	9.4
	195/60 R15	88H	1235	44	6.0	7.9	24.2	9.3
	205/60 R15	91V	1356	44	6.0	8.2	24.7	9.7
	225/60 R15	96V	1565	44	6.5	9.0	25.6	9.8
	205/60 R16	96V XL	1565	44	6.0	8.2	25.7	9.8
	215/60 R16	95V	1521	44	6.5	8.7	26.1	10.0
	225/60 ZR16	98W	1653	44	6.5	9.0	26.6	9.8

Upcoming Sizes

Series	Size	Load Index / Speed Symbol
70 Series	165/70 R14	81H
70 Series	195/70 R14	91H
65 Series	165/65 R14	79T
65 Series	175/65 R13	81T
65 Series	175/65 R15	84H




Medium rib 1

The dynamic medium lateral groove design provides better wet handling and improved rolling resistance



Medium rib 2

The straight dry rib design gives stability and flexibility on dry road



Shoulder block

Designed to get better cornering stability and to reduce noise

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
60 Series	235/60 ZR16	104W XL	1984	44	7.0	9.4	27.1	9.6
55 Series	205/55 ZR16	94W XL	1477	44	6.5	8.4	24.9	9.6
	235/55 ZR17	103W XL	1929	44	7.5	9.6	27.2	9.4
50 Series	205/50 ZR17	93W XL	1433	44	6.5	8.4	25.1	9.1
	215/50 ZR17	95W XL	1521	44	7.0	8.9	25.5	10.0
	225/50 ZR17	98W XL	1653	44	7.0	9.2	25.9	9.2
	235/50 ZR18	101Y XL	1819	44	7.5	9.6	27.3	9.4
45 Series	195/45 ZR16	84W XL	1102	44	6.5	7.7	22.9	9.1
	225/45 ZR17	94W XL	1477	44	7.5	8.9	25.0	9.6
	245/45 ZR17	99W XL	1709	44	8.0	9.6	25.7	9.7
	205/45 ZR18	90Y XL	1323	44	7.0	8.1	25.2	9.1
	225/45 ZR18	95Y XL	1521	44	7.5	8.9	25.9	9.2
	235/45 ZR18	98Y XL	1653	44	8.0	9.3	26.3	9.6
	245/45 ZR18	100Y XL	1764	44	8.0	9.6	26.7	9.7
	245/45 ZR19	102Y XL	1874	44	8.0	9.6	27.7	9.6
40 Series	245/45 ZR20	103Y XL	1929	44	8.0	9.6	28.7	9.8
	195/40 R17	81V XL	1019	44	7.0	7.9	23.1	9.2
	255/40 ZR17	98W XL	1653	44	9.0	10.2	25.0	9.8
	215/40 ZR18	89Y XL	1279	44	7.5	8.6	24.8	9.4
	225/40 ZR18	92Y XL	1168	44	8.0	9.1	25.1	9.8
	235/40 ZR18	95Y XL	1521	44	8.5	9.5	25.4	9.8
	245/40 ZR18	97Y XL	1609	44	8.5	9.8	25.7	9.7
	255/40 ZR18	99Y XL	1709	44	9.0	10.2	26.0	9.7
	225/40 ZR19	93Y XL	1433	44	8.0	9.1	26.1	9.6
	235/40 ZR19	96Y XL	1565	44	8.5	9.5	26.4	9.7

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
40 Series	245/40 ZR19	98Y XL	1653	44	8.5	9.8	26.7	10.0
	245/40 ZR19	98W XL	1653	44	8.5	9.8	26.7	10.0
	255/40 ZR19	100Y XL	1764	44	9.0	10.2	27.0	9.7
	245/40 ZR20	99Y XL	1709	44	8.5	9.8	27.7	9.7
35 Series	255/35 ZR18	94Y XL	1477	44	9.0	10.2	25.0	10.0
	265/35 ZR18	97Y XL	1609	44	9.5	10.7	25.3	9.8
	215/35 ZR19	85Y XL	1135	44	7.5	8.6	24.9	10.0
	225/35 ZR19	88Y XL	1235	44	8.0	9.1	25.2	10.1
	235/35 ZR19	91Y XL	1356	44	8.5	9.5	25.5	10.0
	245/35 ZR19	93Y XL	1433	44	8.5	9.8	25.8	9.8
	255/35 ZR19	96Y XL	1565	44	9.0	10.2	26.0	9.8
	265/35 ZR19	98Y XL	1653	44	9.5	10.7	26.3	10.0
	225/35 ZR20	93Y XL	1433	44	8.0	9.1	26.2	9.6
	235/35 ZR20	92Y XL	1168	44	8.5	9.5	26.5	9.7
	245/35 ZR20	95Y XL	1521	44	8.5	9.8	26.8	9.6
	255/35 ZR20	97Y XL	1609	44	9.0	10.2	27.0	9.8
	245/35 ZR22	97Y XL	1609	44	8.5	9.8	28.8	9.8
30 Series	255/30 ZR19	91Y XL	1356	44	9.0	10.2	25.1	10.1
	265/30 ZR19	93Y XL	1433	44	9.5	10.7	25.3	9.8
	225/30 ZR20	85Y XL	1135	50	8.0	9.1	25.4	9.8
	245/30 ZR20	93Y XL	1433	44	8.5	9.8	25.8	9.6
	255/30 ZR20	92Y XL	1168	44	9.0	10.2	26.1	9.4
	255/30 ZR21	95W XL	1521	44	9.0	10.2	27.0	10.1
	255/30 ZR22	95Y XL	1521	44	9.0	10.2	28.1	9.8

Upcoming Sizes

Series	Size	Load Index / Speed Symbol
45 Series	215/45 ZR18	93Y
	255/45 ZR18	103Y




Medium rib 1

The dynamic medium lateral groove design provides better wet handling and improved rolling resistance



Medium rib 2

The straight dry rib design gives stability and flexibility on dry road



Shoulder block

Designed to get better cornering stability and to reduce noise

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
40 Series	275/40 ZR19	105Y XL	2039	44	9.5	10.9	27.7	9.6
35 Series	275/35 ZR18	99Y XL	1709	44	9.5	10.9	25.6	9.7
	275/35 ZR19	96Y	1565	44	9.5	10.9	26.6	9.7
	285/35 ZR19	103Y XL	1929	44	10.0	11.4	26.9	9.8
	275/35 ZR20	102Y XL	1874	44	9.5	10.9	27.6	9.3
30 Series	275/30 ZR19	96Y XL	1565	44	9.5	10.9	25.6	9.7
	275/30 ZR20	97Y XL	1609	44	9.5	10.9	26.5	9.6
	285/30 ZR20	99Y XL	1709	44	10.0	11.4	26.8	10.0
25 Series	275/25 ZR20	91Y XL	1356	44	10.0	11.1	25.4	9.7
	295/25 ZR21	97W XL	1609	44	10.5	11.9	26.8	10.5

Upcoming Size

Series	Size	Load Index / Speed Symbol	Availability
40 Series	275/40ZR18	103Y	Oct-15



Triple Rib

Designed for high speed stability and better steering response



Shoulder Blocks

Designed to get better cornering stability and manoeuvrability



Additional Sipes

to reduce pattern noise

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
55 Series	195/55 R15	89V XL	1279	44	6.0	7.9	23.4	9.3
	205/55 R15	88V	1235	44	6.5	8.4	23.9	9.4
	195/55 R16	91V XL	1356	44	6.0	7.9	24.4	10.0
	215/55 ZR16	97W XL	1609	44	7.0	8.9	25.3	9.7
	225/55 ZR16	99W XL	1709	44	7.0	9.2	25.7	9.6
	215/55 ZR17	98W XL	1653	44	7.0	8.9	26.3	9.6
	225/55 ZR17	101W XL	1819	44	7.0	9.2	26.8	9.6
50 Series	195/50 R15	82V	1047	44	6.0	7.9	22.7	9.7
	205/50 ZR15	89W XL	1279	44	6.5	8.4	23.1	9.6
	195/50 R16	84V	1102	44	6.0	7.9	23.7	9.8
	205/50 ZR16	91W XL	1356	44	6.5	8.4	24.1	9.6
	225/50 ZR16	96W XL	1565	44	7.0	9.4	24.9	9.8
	225/50 ZR17	98W XL	1653	44	7.0	9.2	25.9	10.1
	225/50 ZR18	99W XL	1709	44	7.0	9.2	23.7	9.6
45 Series	235/50 ZR18	101Y XL	1819	44	7.5	9.6	27.3	10.1
	195/45 R15	78V	937	44	6.5	7.7	21.9	9.3
	205/45 ZR16	87W	1202	44	7.0	8.1	23.2	9.2
	215/45 ZR17	91W XL	1356	44	7.0	8.4	24.7	9.4
	205/45 ZR17	88W XL	1235	44	7.0	8.1	24.3	9.4
	235/45 ZR17	97W XL	1609	44	8.0	9.3	25.4	9.6
	235/45 ZR18	98Y XL	1653	44	8.0	9.3	26.3	9.7
40 Series	245/45 ZR18	100Y XL	1764	44	8.0	9.6	26.7	9.8
	205/40 ZR17	84W XL	1102	44	7.5	8.3	23.5	9.4
	215/40 ZR17	87W XL	1202	44	7.5	8.6	23.8	9.7
	245/40 ZR17	95W XL	1521	44	8.5	9.8	24.7	10.0

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
40 Series	205/40 ZR18	86Y XL	1168	44	7.5	8.3	24.4	8.9
	245/40 ZR18	97Y XL	1609	44	8.5	9.8	25.7	10.0
	245/40 ZR20	99Y XL	1709	44	5.5	9.8	27.7	10.0
35 Series	185/35 R17	82V XL	1047	44	6.5	7.4	22.1	10.2
	255/35 ZR19	96Y XL	1565	44	9.0	10.2	26.0	10.1
	255/35 ZR20	97Y XL	1609	44	9.0	10.2	27.0	10.0

Upcoming Sizes


Series	Size	Load Index / Speed Symbol
60 Series	205/60 R14	88H
45 Series	225/45 ZR19	96W
45 Series	195/45 ZR16	84W
35 Series	245/35 ZR20	95Y XL
35 Series	245/35 ZR18	92Y
35 Series	225/35 ZR18	87Y

*Sporty appearance
having excellent wet grip*



Medium big block

The lateral grooves with 45 ° angles designed to clear water and to reduce noise



Center straight grooves

Designed to clear water rapidly, overcome hydroplaning phenomenon, thereby, improving road contact on wet condition



Center rib

The straight dry rib design gives stability and flexibility on high speed


UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
65 Series	185/65 R15	88V	1235	44	5.5	7.4	24.4	9.2
	185/65 R15	88H	1235	44	5.5	7.4	24.4	9.1
	195/65 R15	91V	1356	44	6.0	7.9	25.0	8.9
	215/65 R15	100H XL	1764	44	6.5	8.7	26.0	9.2
	215/65 R15	100V XL	1764	44	6.5	8.7	26.0	9.6
	215/65 R16	102V XL	1874	44	6.5	8.7	27.0	9.6
60 series	185/60 R13	80V	992	44	5.5	7.4	21.7	9.6
	185/60 R15	88V XL	1235	44	5.5	7.4	23.7	9.6
	195/60 R15	91V	1356	44	6.0	7.9	24.2	10.0
	205/60 R15	91V	1356	44	6.0	8.2	24.7	9.3
	225/60 R15	96V	1565	44	6.5	9.0	25.6	9.4
	205/60 R16	96V XL	1565	44	6.0	8.2	25.7	9.8
	215/60 R16	99V XL	1709	44	6.5	8.7	26.1	10.2
	225/60 ZR16	102W XL	1874	44	6.5	9.0	26.6	9.6
55 series	185/55 R14	80V	992	44	6.0	7.6	22.0	9.6
	195/55 R15	89V XL	1279	44	6.0	7.9	23.4	9.7
	205/55 R15	88V	1235	44	6.5	8.4	23.9	9.3
	195/55 R16	91V XL	1356	44	6.0	7.9	24.4	10.0
	205/55 ZR16	94W XL	1477	44	6.5	8.4	24.9	9.3
	215/55 ZR16	97W	1609	44	7.0	8.9	25.3	9.8
	225/55 ZR16	99W XL	1709	44	7.0	9.2	25.7	10.2
	215/55 ZR17	98W XL	1653	44	7.0	8.9	26.3	10.1
	225/55 ZR17	101W XL	1819	44	7.0	9.2	26.8	9.7
50 Series	195/50 R15	82V	1047	44	6.0	7.9	22.7	8.8
	205/50 ZR15	89W XL	1279	44	6.5	8.4	23.1	9.7

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
50 Series	195/50 R16	84V	1102	44	6.0	7.9	23.7	9.8
	205/50 ZR16	91W XL	1356	44	6.5	8.4	24.1	10.0
	225/50 ZR16	96W XL	1565	44	7.0	9.2	24.9	10.3
	215/50 ZR17	95W XL	1521	44	7.0	8.9	25.5	9.2
	225/50 ZR18	99W XL	1709	44	7.0	9.2	26.9	9.7
45 series	195/45 R15	78V	937	44	6.5	7.7	21.9	9.6
	205/45 R16	87V	1202	44	7.0	8.1	23.2	10.0
	205/45 ZR16	87W	1202	44	7.0	8.1	23.2	9.6
	215/45 R16	90W XL	1323	44	7.0	8.4	23.6	10.0
	205/45 ZR17	88W XL	1235	44	7.0	8.1	24.3	10.0
	215/45 ZR17	91W XL	1356	44	7.0	8.4	24.6	9.3
	225/45 ZR17	94W XL	1477	44	7.5	8.9	25.0	10.1
40 series	235/45 ZR17	97W	1609	44	8.0	9.3	25.4	9.3
	205/40 ZR17	84W XL	1102	44	7.5	8.3	23.5	9.6
	215/40 ZR17	87W	1202	44	7.5	8.6	23.8	9.3
	245/40 ZR17	95W XL	1521	44	7.5	9.8	24.7	9.7
	205/40 ZR18	86Y XL	1168	44	7.5	8.3	24.4	9.6
35 series	205/35 ZR18	81Y XL	1019	44	7.5	8.3	23.7	9.7



Two main ribs
Center two ribs provide precise handling



Water film breaker
Help to reduce hydroplaning



Three main grooves and directional grooves
Aid in draining of water rapidly

UTQG 180 AA A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
50 Series	195/50 R15	82V	1047	44	6.0	7.9	22.7	8.6
45 Series	225/45 R17	91W	1356	44	7.5	8.9	25.0	8.8
40 Series	235/40 R18	91W	1356	44	8.5	9.5	25.4	9.7
35 Series	265/35 R18	93W	1433	44	9.5	10.7	25.3	9.3



Wider shoulder block

Designed to get better cornering stability and to reduce noise



Multi cone lateral groove

Designed to clear water rapidly, improve road contact on wet condition and maintain low temperature on dry condition



V-Shaped tread pattern

Designed to get stability on high speed and to overcome aquaplaning

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
35 Series	215/35 ZR18	84W XL	1102	44	7.5	8.6	23.9	9.7

ACCELERA

All Season Tires

Affordable directional tire



Twin straight groove

Designed to get stability and overcome aquaplaning phenomenon



Center rib

The central rib of pattern provides directional stability and quick steering response



Unique shoulder block

Optimum stability on cornering

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
70 Series	175/70 R13	82H	1047	44	5.0	7.0	22.7	9.1
65 Series	175/65 R14	82H	1047	44	5.0	7.0	23.0	9.2

ACCELERA 651

All Season Tires

Sporty and Comfort to drive



Unique center V-block

Fuel saver and stable on high speed, good handling and steering response



Huge, reinforced shoulder block

Having good cornering power even on high speed.



Unique V-type groove

Clears water rapidly to protect you from aquaplaning

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
65 Series	195/65 R15	91V	1356	44	6.0	7.9	25.0	10.0



Unique zigzag shoulder block pattern

Good to overcome aquaplaning phenomenon on wet road. It is also good for noise reduction



Dynamic U-block

Grips both dry and wet surfaces properly



Continuous center rib

Assure stability on straight line

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
65 Series	165/65 R13	77T	908	44	5.0	6.7	21.4	9.6
60 Series	175/60 R13	77H	908	44	5.0	7.0	21.3	9.3
55 Series	165/55 R13	70H	739	44	5.0	6.7	20.2	9.4



Tough shoulder block
Optimum stability on cornering



Twin angle at circumferential grooves
Maintain stability and good handling on straight line




Dynamic tread grooves
To clear water rapidly

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
70 Series	185/70 R14	88H	1235	44	5.5	7.4	24.3	10.0
60 Series	185/60 R15	88V XL	1235	44	5.5	7.4	23.7	10.2



Tough shoulder block
Optimum stability on cornering




Three wide circumferential grooves
Maintain stability and good handling on straight line



Dynamic tread grooves
To clear water rapidly

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
70 Series	175/70 R13	82H	1047	44	5.0	7.0	22.7	9.4
	195/70 R14	91H	1356	44	6.0	7.9	24.8	9.3
60 Series	195/60 R14	86H	1168	44	6.0	7.9	23.2	10.6
	195/60 R15	91V	1356	44	6.0	7.9	24.2	10.7
55 Series	185/55 R15	86V XL	1168	44	6.0	7.6	23.0	10.6
	195/55 R15	89V XL	1279	44	6.0	7.9	23.4	10.7
	195/55 R16	91V XL	1356	44	6.0	7.9	24.4	10.8
50 Series	205/50 ZR17	93W XL	1433	44	6.5	8.4	25.1	11.0




Triple dynamic block

Designed to get stability at high speed and gives you low noise



Combination grooves

The combination of two main grooves with V-shape ones provide efficient water drainage to overcome aquaplaning risk



Unique shoulder blocks

To assure stability on cornering

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
65 Series	185/65 R14	86H	1168	44	5.5	7.4	23.5	10.2
	205/65 R15	94V	1477	44	6.0	8.4	24.1	9.7
60 Series	185/60 R14	82H	1047	44	5.5	7.4	22.8	10.1


accelera



SPEED 'N STYLE TYRES

IOTA -ST68

All Season Tires



Main grooves

To channel out water from footprint area to overcome aquaplaning



Three interlocked block lanes

Provide directional stability and quick steering response



Exclamation sipes

Help to break thin layer of water film to prevent aquaplaning

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
70 Series	265/70 R16	116H XL	2756	51	8.0	10.7	30.6	9.8
65 Series	265/65 R17	116H	2403	51	8.0	10.7	30.6	10.0
60 Series	275/60 R20	115V XL	2679	51	8.0	11.0	33.0	10.0
55 Series	255/55 R18	109V XL	2271	51	8.0	10.4	29.0	10.0
	245/55 ZR19	103Y	1929	51	7.5	10.0	29.6	9.7
50 Series	245/50 ZR20	102Y	1874	51	7.5	9.4	27.1	9.8
	285/50 R20	116V XL	2756	51	9.0	11.7	31.3	10.0
40 Series	265/40 R20	104V XL	1984	51	9.5	10.7	28.3	9.8
	285/40 R22	110V XL	2337	51	10.0	11.4	31.0	9.8
35 Series	285/35 R22	106W XL	2094	51	10.0	11.4	29.9	9.8
30 Series	235/30 ZR22	90W XL	1323	51	8.5	9.5	27.6	9.8
	245/30 ZR22	92W XL	1168	51	8.5	9.8	27.8	9.8
	255/30 ZR22	95W XL	1521	51	9.0	10.2	28.1	9.8

Upcoming Sizes

Series	Size	Load Index / Speed Symbol
60 Series	275/60 R20	115V
55 Series	275/55R20	117V
50 Series	275/50R22	111V
45 Series	265/45R20	104Y
	285/45 ZR21	109W
	275/45R21	110V
	275/45R22	112W

Series	Size	Load Index / Speed Symbol
40 Series	305/40 R22	114W
	275/40 R22	108Y XL
35 Series	285/35 ZR21	105Y
	305/35 ZR24	112W
	295/35 ZR24	110W
30 Series	325/30 ZR21	108Y




Wet side pattern

Multi grooves clear water rapidly to avoid hydroplaning to get excellent grip on wet surface



Dry side pattern

Bigger blocks with double grooves grip perfectly on dry surface



Balance center rib

Provides better handling stability whether on dry or wet surface

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
70 Series	265/70 R16	116H XL	2756	44	8.0	10.7	30.6	10.0
65 Series	225/65 R17	106V XL	2094	50	6.5	9.0	28.5	9.6
	235/65 R17	108V XL	2205	50	7.0	9.4	29.1	9.6
60 Series	215/60 R17	100V XL	1764	50	6.5	8.7	27.2	9.8
	255/60 R17	110V XL	2337	50	7.5	10.2	29.1	10.3
	235/60 R18	107V XL	2150	50	7.0	9.4	29.1	9.7
	255/60 R18	112V XL	2469	50	7.5	10.2	30.0	10.1
	265/60 R18	114V XL	2601	50	8.0	10.7	30.5	10.0
	215/55 R18	99V XL	1709	50	7.0	8.9	27.3	9.8
55 Series	235/55 R18	104W XL	1984	50	7.5	9.6	28.1	9.4
	255/55 R18	109V XL	2271	50	8.0	10.4	29.0	10.0
	275/55 R20	117V XL	2833	50	8.5	11.2	31.9	9.6
	235/50 R19	103V XL	1929	51	7.5	9.6	28.3	10.0
50 Series	255/50 R19	107V XL	2150	50	8.0	10.4	29.1	10.3
	255/50 R20	109V XL	2271	50	8.0	10.4	30.1	10.3
	265/50 R20	112V XL	2469	50	8.5	10.9	30.5	10.0
	275/45 R19	108W XL	2205	50	9.0	10.7	28.8	9.8
45 Series	285/45 R19	111V XL	2403	50	9.5	11.2	29.1	9.3
	255/45 R20	105V XL	2039	50	8.5	10.0	29.1	10.3
	265/45 R20	102Y	1984	50	9.0	10.5	29.4	10.2
	275/45 R20	112V XL	2469	50	9.0	10.7	29.8	10.1
	275/45 R22	112W XL	2469	44	9.0	10.7	31.8	9.7
	275/40 R20	106Y XL	2094	50	9.5	10.9	28.7	10.2
40 Series	265/40 R22	106V XL	2094	50	9.5	10.7	30.4	10.0
	305/40 R22	114V XL	2601	50	11.0	12.3	31.6	10.5

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
35 Series	315/35 R20	110W XL	2337	50	11.0	12.6	28.7	10.1
	295/35 ZR21	107Y XL	2150	50	10.5	11.9	29.1	10.0
	265/35 ZR22	102W XL	1874	50	9.5	10.7	29.3	10.1
	285/35 R22	106W XL	2094	50	10.0	11.4	29.9	10.0
30 Series	295/30 R22	103Y XL	1929	44	10.5	11.9	29.0	9.8

Upcoming Size


Series	Size	Load Index / Speed Symbol
60 Series	235/60R17	102H

**Huge blocks with multi sipes grip better**

Combination of wide, dynamic block designs grip strongly on slippery road. The multi sipes create low noise and enable driving comfort

**Straight center block**


Balance, straight center block handles perfectly on highway

**Wide grooves**

Designed to clear mud on off-road situation easily and to ease water clearance on highway

UTQG 400 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
75 Series	235/75 R15	105S	2039	44	6.5	9.3	28.9	9.3
70 Series	235/70 R15	103S	1929	44	7.0	9.4	28.0	13.0




The interlocked blocks

The combination of center and intermediate interlocked blocks with 2 sipes assure comfort driving on highway



Block's stepped edges; Z-shaped sipes

Enhance traction on off-road surface, provide excellent cornering and prevent irregular wear



Two main grooves with notched ones

Clear water from footprint area effectively to eliminate hydroplaning and maintain wet braking

UTQG 600 A A

Series	Size	Load Index / Speed Symbol	PR	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single/Dual (lbs)	psi	Inches	Inches	Inches	32 nds
85 Series	LT 235/85 R16	120/116Q	10	3086/2756	80	6.5	9.3	31.7	13.2
75 Series	LT 245/75 R16	120/116Q	10	3086/2756	80	7.0	9.8	30.5	13.6
	LT 265/75 R16	123/120Q	10	3418/3086	80	7.5	10.5	31.7	13.4
70 Series	LT 265/70 R17	121/118Q	10	3197/2911	80	8.0	10.7	31.7	13.4

Upcoming Sizes

Series	Size	Load Index / Speed Symbol
50 Series	265/50 R20	111S XL
	285/50 R20	116V

OMIKRON H/T

All Season Tires

Best for Highway terrain



Three semi Ribs with interlock Blocks
Maintain stability on highway, give comfort and quiet ride



Four Wide Grooves
Drain water rapidly to prevent aquaplaning and enhance wet performance



Wide Tread with Silica compound
Improves traction, especially in cold, wet weather

UTQG 600 A A

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
70 Series	245/70 R16	107T	2150	51	7.0	9.4	29.5	10.5
	255/70 R16	111T	2403	51	7.5	10.2	30.1	11.3
	245/70 R17	110T	2337	51	7.0	9.8	30.6	10.5
65 Series	245/65 R17	107T	2150	51	7.0	9.8	29.5	10.7

Upcoming Sizes

Series	Size	Load Index / Speed Symbol
70 Series	265/70 R17	115H



Unique tread blocks

A pair of unique tread blocks with wide sipes on the center are intended to increase off-road traction



Open scalloped hump tread

Good traction on off-road surface; equipped in between block slots to drain water rapidly and throw away trapped rocks, mud & other foreign material



Deep tread design

Deep tread design is aimed to hold ground strongly and to maintain grip on loose surface

Series	Size	Load Index / Speed Symbol	PR	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single/Dual (lbs)	psi	Inches	Inches	Inches	32 nds
Flotation	LT 31 X 10.50 R15	109Q	6	2271	51.0	8.5	10.6	30.5	17.4
75 Series	LT 235/75 R15	104/101Q	6	1985/1818	50.0	6.5	9.3	28.9	16.5
55 Series	LT 275/55 R20	115/112P	8	2678/2470	65.0	8.5	8.0	31.9	18.3

Upcoming Sizes

Series	Size	Load Index / Speed Symbol	PR
Flotation	37X12.50 R17 LT	124Q	8
	35X12.50 R18 LT	123Q	10
	37X12.50 R18 LT	123Q	8
	35X12.50 R20 LT	121Q	10
	37X12.50 R20 LT	126P	10
	33x12.50 R20 LT	114Q	10
45 Series	275/45 R22	112P XL	-

accelera



SPEED 'N STYLE TYRES

ULTRA-3


All Season Tires

*Durable and economical tire
for commercial vans***Wide grooves**

Two wide grooves plus smaller centre groove channel out water effectively to overcome hydroplaning force

**Twin ribs and circumferential sipes**

Provide on and off road traction in dry and wet conditions; enhancing driving comfort

**Notched shoulder blocks**

Provide good cornering stability

Series	Size	Load Index / Speed Symbol	PR	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single/Dual (lbs)	psi	Inches	Inches	Inches	32 nds
65 Series	235/65 R16C	115/113R	8	2679 /2535	69	7.0	9.4	28.0	12.2
70 Series	195/70 R15C	104/102R	8	1984/1874	65	6.0	7.9	25.8	11.6
75 Series	195/75 R16C	107/105S	8	2150/2040	69	5.5	7.7	27.5	11.6
LTRC	195 R14C	106/104S	8	2094/1984	65	5.5	7.8	26.2	11.6
LTRC	195 R15C	106/104R	8	2094/1984	65	5.5	7.8	27.2	12.2

ULTRA-2

All Season Tires

Best for commercial vans



Zigzag circumferential grooves

Designed for stability under heavy load either on wet or dry road



Twin rib with multi sipes

Designed for excellent braking, and wear resistance under heavy load condition



Rounded shoulder blocks

Designed to prevent damage by sharp stones

Series	Size	Load Index / Speed Symbol	PR	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				Single/Dual (lbs)	psi	Inches	Inches	Inches	32 nds
LTRC	LT 185 R14C	102/100P	8	1874/1764	65	5.5	7.4	25.6	9.6

accelera



SPEED 'N STYLE TYRES




Safe and reliable winter tires



Unique directional tread pattern with cross grooves
Easily clears water to minimize the bad effect of hydroplaning force



Various edge blocks with high sipe density
Excellent grip and better traction on snowy and icy roads



Zigzag center groove
Self-cleaning function to clean snow from center groove

Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			lbs	psi	Inches	Inches	Inches	32 nds
65 Series	185/65 R14	86H	1168	44	5.5	7.4	23.5	10.1
	175/65 R14	82T	1047	44	5.0	7.0	23.0	10.1
	185/65 R15	88H	1235	44	5.5	7.4	24.4	10.5
	195/65 R15	91T	1356	44	6.0	7.9	25.0	10.6
	215/65 R16	102H XL	1874	44	6.5	8.7	27.0	11.1
60 Series	235/65 R17	108H XL	2205	44	7.0	9.4	28.1	11.1
	195/60 R15	88H	1235	44	6.0	7.9	24.2	10.1
55 Series	205/60 R16	96H XL	1565	44	6.0	8.2	25.7	10.7
	185/55 R15	86H XL	1168	44	6.0	7.6	23.0	10.0
	195/55 R15	89H XL	1279	44	6.0	7.9	23.4	11.5
	195/55 R16	91H XL	1356	44	6.0	7.9	24.4	10.3
	205/55 R16	91H	1356	44	6.5	8.4	24.9	10.6
	215/55 R16	97V XL	1609	44	7.0	8.9	25.3	10.7
	225/55 R16	99V XL	1709	44	7.0	9.2	25.7	11.0
	225/55 R17	101V XL	1819	44	7.0	9.2	26.8	11.2
	215/55 R18	99V XL	1709	44	7.0	8.9	27.3	11.1
	235/55 R18	104V XL	1984	44	7.5	9.6	28.1	11.0
50 Series	225/55 R19	99V	1709	44	7.0	9.2	28.8	11.2
	205/50 R17	93V XL	1433	44	6.5	8.4	25.1	11.1
	225/50 R17	98V XL	1653	44	7.0	9.2	25.9	10.6
45 Series	225/45 R17	94V XL	1477	44	7.5	8.9	25.0	11.1
	225/45 R18	95V XL	1521	44	7.5	8.9	25.9	10.5
	235/45 R18	98V XL	1653	44	8.0	9.3	26.3	11.0
40 Series	225/40 R18	92V XL	1168	44	8.0	9.1	25.1	11.1
	235/40 R18	95V XL	1521	44	8.5	9.5	25.4	11.2
	245/40 R18	97V XL	1609	44	8.5	9.8	25.7	11.0



World Certificates:



ISO 9001



SNI
Indonesia



DOT
USA



E.Mark
Europe



INMETRO
Brazil



CCC
China



GSO
Gulf countries

